


One Port of eight Digital Bits,  
Software Configurable  
as eight inputs or eight outputs, (sink or source)  
1A internal fuse per bit (on low numbered pins)



Each Analog Output Port  
Software Configurable for  
UniPolar BiPolar  
0 to 10 +/- 10  
0 to 5 +/- 5

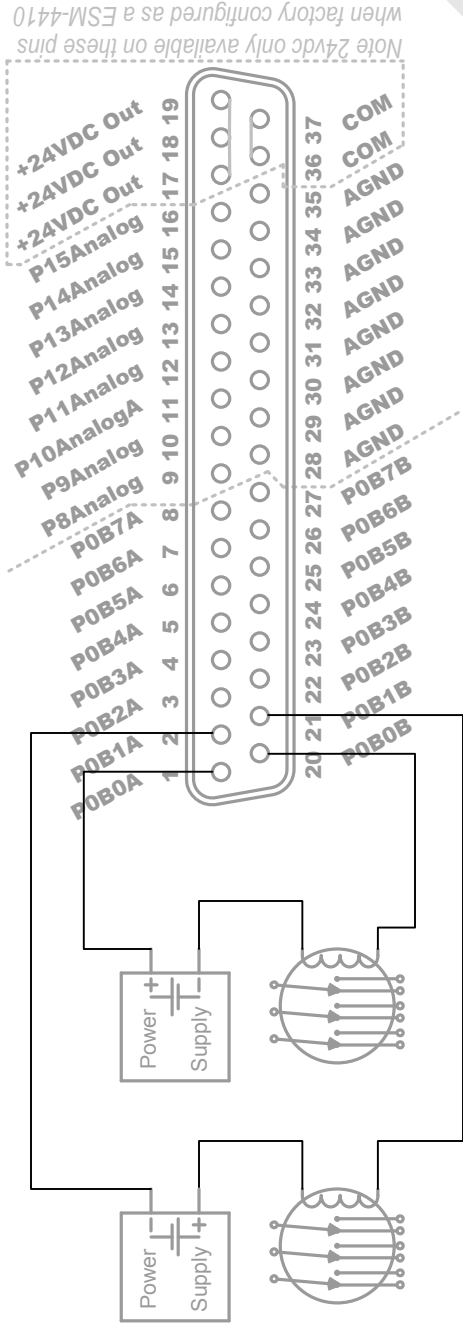